

**MODEL VD-305A
CAPACITIVE
VOLTAGE
DIVIDER
(for use in air)**

Maximum Pulse Voltage, in air	50 kilovolt
Voltage Division Ratio, in air	5000:1
Frequency Range, into $1\text{M}\Omega$ load	70 Hz to 4 MHz
Droop Rate, into $1\text{ M}\Omega$ load	0.05 % / μsecond
Usable Rise-time	100 nanosecond
Capacitance added to circuit	8 pF (approximate)

The Model VD-305A capacitive voltage divider is intended for the measurement of voltage amplitude and wave-shape of ac signals at high potential. It has a nominal division ratio of 5000:1, and the exact measured ratio is printed on the name-plate. This ratio is measured in air at 22°C, and is accurate to $\pm 5\%$. The division ratio is temperature compensated to $\pm 1\%$ over the range of 20° to 80°C.

The unit consists of two capacitors connected in series. The high voltage center electrode forms a capacitor with a guarded pickup ring located in the lower metal cylinder. This pickup ring is connected to the center conductor of the output connector via a 50Ω resistor. The low-voltage capacitor connects the pickup ring to the outer conductor of the connector. The output voltage is thus a fraction of the input voltage determined by the ratio of the capacitances.



The maximum pulse voltage rating for use in air is 50 kV. This rating is for pulses up to 5 $\mu\text{seconds}$ duration. Consult Pearson engineering for voltage derating for longer pulses.

As manufactured, the outer conductor of the connector is isolated from the case. Safe operation requires that a connection be made from the connector shell to ground. However, this isolation makes it possible to choose the location and nature of this connection so that ground loops may be controlled.

The conductor connecting the high voltage to the voltage divider should be free of sharp points or edges, and of sufficient diameter to avoid corona and arcs. The outer conductor of a standard coaxial cable, such as RG-58, works well. The conductor should be located as far as possible from the acrylic chimney and any grounded conductors such as the case or the output cable. Occasional arcs usually do not cause damage to the unit. However, if sustained arcing causes visible damage to the acrylic chimney, the unit should be returned for repair. The screws which attach the chimney to the base also hold the guard ring and should not be removed by the user. The VD-305A can be secured to a base-plate or tank bottom with 1/4 inch bolts or studs. Two four-place bolt circles are provided. The smaller diameter circle is compatible with early units.

PEARSON ELECTRONICS, INC.

MODEL VD-305A CAPACITIVE VOLTAGE DIVIDER

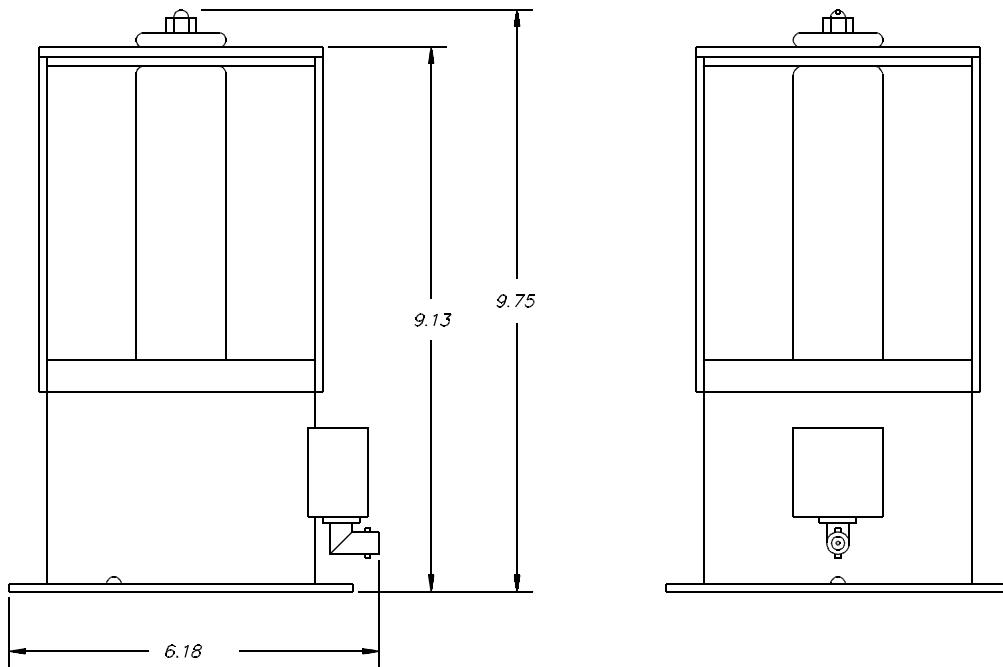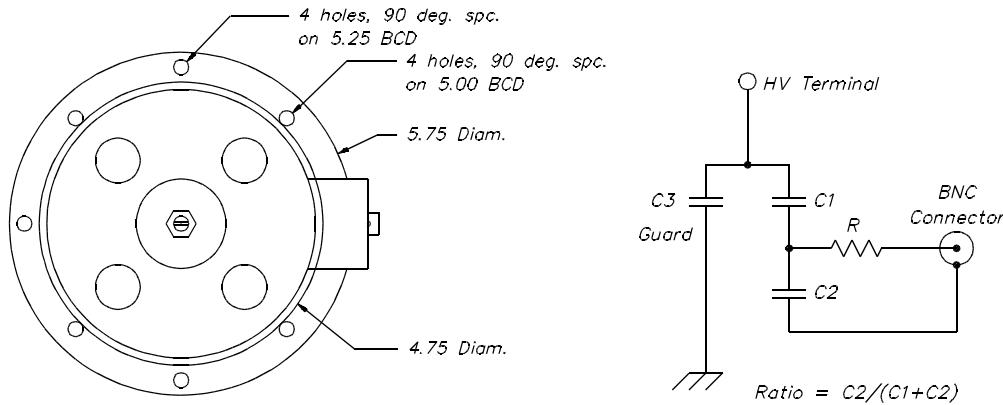

© 1992 Pearson Electronics, Inc.

Pearson Electronics, Inc. • 4009 Transport Street • Palo Alto, CA 94303
Telephone 650-494-6444 • FAX 650-494-6716 • www.pearsonelectronics.com